


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.125   HS Corner Return

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 190 × 190mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	20
units per tonne	50
number per pallet	90
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

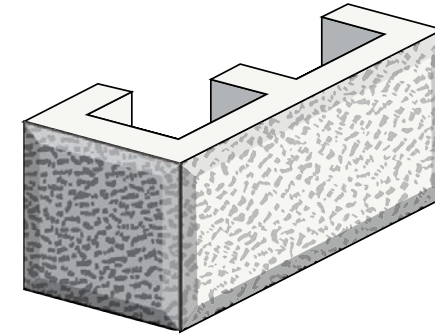

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.125   HS Veneer

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 100 × 190mm
core volume (% overall thickness)	<23
characteristic unconfined compressive strength (MPa)	>15
minimum shell thickness (mm)	25.40
average weight (KG)	11.1
units per tonne	90
number per pallet	150
number per sqm/lm	12.5
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	148
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram



### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.93   HS Half

### Properties and Specifications

actual dimensions (length x width x height mm)	190 × 100 × 190mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	4.8
units per tonne	208
number per pallet	300
number per sqm/lm	25
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram



### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.95   HS Veneer Solid

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 100 × 190mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	14.5
units per tonne	68.96
number per pallet	200
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram



### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.971   HS Half Height

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 100 × 90mm
core volume (% overall thickness)	<24
characteristic unconfined compressive strength (MPa)	>15
minimum shell thickness (mm)	25.40
average weight (KG)	5.6
units per tonne	179
number per pallet	300
number per sqm/lm	25 or 2.5 PER LM
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	159
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

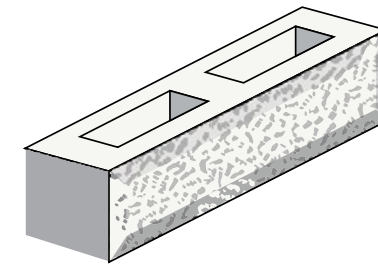

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.121   HS Standard

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 190 × 190mm
core volume (% overall thickness)	<45
characteristic unconfined compressive strength (MPa)	>15
minimum shell thickness (mm)	30.40
average weight (KG)	16.7
units per tonne	60
number per pallet	90
number per sqm/lm	12.5
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	219
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

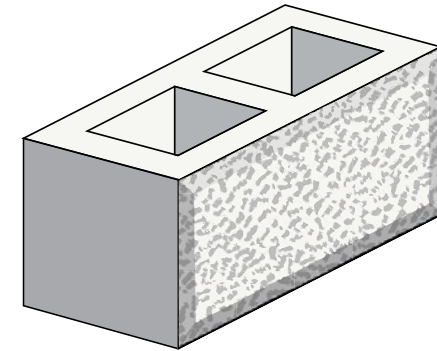

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry  
from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.123   HS Half

### Properties and Specifications

actual dimensions (length x width x height mm)	190 × 190 × 190mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	9.5
units per tonne	105
number per pallet	180
number per sqm/lm	25
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram



### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.125   HS Half Lintel

### Properties and Specifications

actual dimensions (length x width x height mm)	190 × 190 × 190mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	14.3
units per tonne	69
number per pallet	120
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram



### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes




### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	10.126   HS Three Quarter Lintel

### Properties and Specifications

actual dimensions (length x width x height mm)	190 × 190 × 290mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	14.3
units per tonne	69
number per pallet	120
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram



### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	20.127   HS Half Lintel

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 190 × 90mm
core volume (% overall thickness)	<48
characteristic unconfined compressive strength (MPa)	>15
minimum shell thickness (mm)	30.40
average weight (KG)	8.3
units per tonne	120
number per pallet	180
number per sqm/lm	25 or 2.5 PER LM
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	228
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

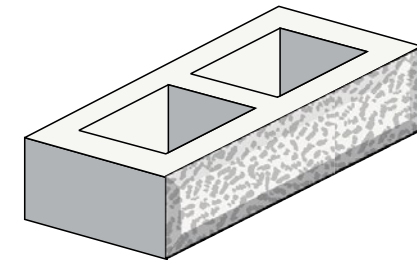

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	20.133   HS Knockout

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 190 × 190mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	18.2
units per tonne	54
number per pallet	90
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

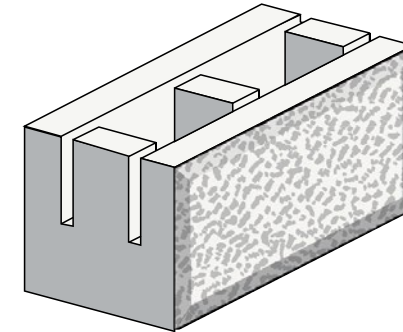

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	20.139   HS Corner

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 190 × 190mm
core volume (% overall thickness)	<30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	20
units per tonne	50
number per pallet	90
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

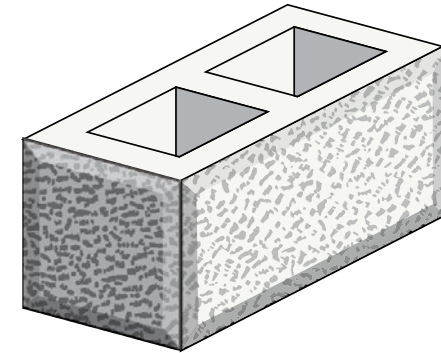

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry  
from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	41.41   Double Sided Split Capping Tile

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 260 × 75mm
core volume (% overall thickness)	30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	20
units per tonne	50
number per pallet	120
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

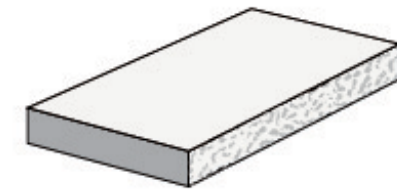

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	41.44   Split End Capping Tile

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 260 × 75mm
core volume (% overall thickness)	>30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	20
units per tonne	50
number per pallet	120
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

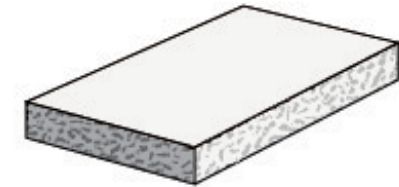

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	41.48   Split Edge Capping Tile

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 300 × 75mm
core volume (% overall thickness)	>30
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	14.7
units per tonne	68
number per pallet	120
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

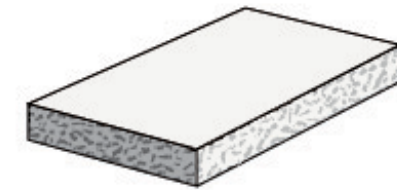

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	50.65   Split Pier Capping Tile

### Properties and Specifications

actual dimensions (length x width x height mm)	325 × 325 × 75mm
core volume (% overall thickness)	>30-
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	13.2
units per tonne	76
number per pallet	90
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

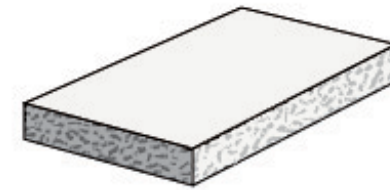

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes




### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	50.66   Four Sided Pier Capping Tile

### Properties and Specifications

actual dimensions (length x width x height mm)	330 × 330 × 75mm
core volume (% overall thickness)	>30-
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	13.2
units per tonne	76
number per pallet	90
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

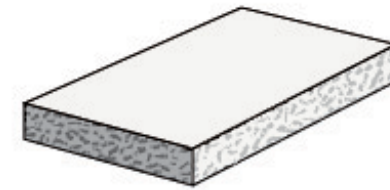

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes


### Product Details

range name	GB Sandstone Rock Face
finish	Rock Face
colours	Brisbane Blend, Sydney Blend, Endeavour Blend & Limestone
product code   description	50.70   Split Step Tread

### Properties and Specifications

actual dimensions (length x width x height mm)	390 × 350 × 75mm
core volume (% overall thickness)	-
characteristic unconfined compressive strength (MPa)	-
minimum shell thickness (mm)	-
average weight (KG)	16.9
units per tonne	59
number per pallet	90
number per sqm/lm	-
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	Exposure Grade
wall mass inc mortar hollow	-
wall mass inc grouted solid	-
Light Reflectance Value	-

### Diagram

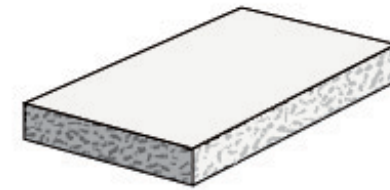

### Fire Resistance Levels^

structural adequacy (see notes)	60 to 240
integrity	60
insulation	60

### Notes

Maximum slenderness ratio (srf) unreinforced masonry from AS3700:2018 Table 6.1 is:

18.0 at 60 minutes | 17.0 at 90 minutes

16.0 at 120 minutes | 15.5 at 180 minutes | 15.5 at 240 minutes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes